


普通厚度铜版卡用纸技术规范

Technical specification of Standard C2S



- ① 面层涂布
Top Coating
- ② 漂白硫酸盐浆
Bleached Sulphate Pulp
- ③ 漂白化学机械浆
BCTMP
Make cards, tags and brochures without folding
- ④ 漂白硫酸盐浆
Bleached Sulphate Pulp
Suitable for offset printing
- ⑤ 底层涂布
Bottom Coating

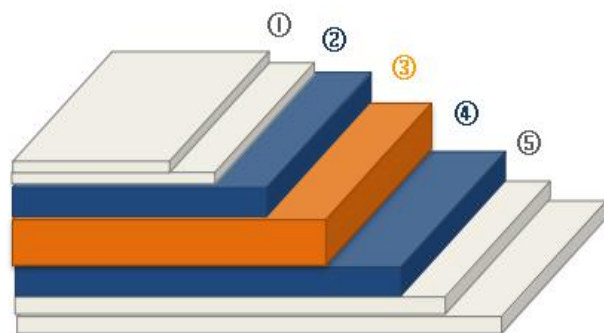

检测项目 Items		单位 Unit	标准 Standards	控制范围 Tolerance	标准基准 Standard Substance			
定量 Grammage		g/m ²	GB/T451.2	±3%	230	250	300	350
厚度 thickness		um	GB/T451.3	±10	255	285	350	410
		PT	USA	±0.6	10.0	11.2	13.8	16.1
挺度 Stiffness	MD	mN.m	GB/T22364	≥	4.8	5.0	12.0	17.0
	CD			≥	2.4	2.7	6.0	8.9
表面吸水 Cobb(60s)		g/m ²	ISO535	≤	40			
表面粗糙度 Surface roughness PPS10		um	ISO8791-4	≤	1.5			
表面强度 Surface strength		m/s	GB/T22365	>	1.5			
层间结合 Ply bond		J/m ²	GB/T26203	>	130			
白度 Brightness(ISO)		%	GB/T7974	±3	90.0			
光泽度 Gloss		%	GB/T8941	≥	50.0			
水分Moisture		%	GB/T462	±1	7.0			

检测条件 Testing Condition :



温度Temperature : (23±2) °C

相对湿度Relative Humidity : (50±2) %

