


## Snow Eagle C2S Coated Art Paper - Gloss

雪鹰双面铜版纸

SDPM3, SDPM8

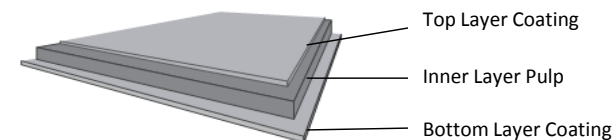

### Technical Specifications

Items	项目	Unit	Standard/ Method	Parameters														
				80	90	100	105	115	118	120	128	140	148	157	170	200	216	250
Basis Weight	定量	gsm	ISO 536	80	90	100	105	115	118	120	128	140	148	157	170	200	216	250
Caliper	厚度	μm	ISO 534	63	73	80	84	91	93	95	104	120	128	136	148	180	196	235
ISO Brightness	亮度	%	ISO 2470	92±1	92±1	92±1	92±1	92±1	92±1	92±1	92±1	92±1	92±1	92±1	92±1	92±1	92±1	92±1
Bulk	松厚度	cm <sup>3</sup> /g	ISO 534	0.788	0.811	0.79	0.79	0.791	0.79	0.79	0.79	0.86	0.865	0.87	0.871	0.9	0.907	0.94
Gloss 75°	光泽度	%	ISO 8254/1	≥70	≥70	≥70	≥70	≥70	≥70	≥70	≥70	≥70	≥70	≥70	≥70	≥70	≥70	≥70
Ink absorption	油墨吸收率	%	K&N	22±3	22±3	22±3	22±3	22±3	22±3	22±3	22±3	22±3	22±3	22±3	22±3	22±3	22±3	22±3
Surface Printing Intensity	表面印刷强度	m/s	ISO 3783	≥1.50	≥1.50	≥1.50	≥1.50	≥1.50	≥1.50	≥1.50	≥1.50	≥1.50	≥1.50	≥1.50	≥1.50	≥1.50	≥1.50	≥1.50
Roughness	粗糙度	μm	ISO 8791/4	≤1.20	≤1.20	≤1.20	≤1.20	≤1.20	≤1.20	≤1.20	≤1.20	≤1.20	≤1.20	≤1.20	≤1.20	≤1.20	≤1.20	≤1.20

\* HSWO grade is available on demand

\* FSC grade is available

\* End uses: High quality magazines, Catalogues, Brochures, Promotional communications, Posters, Leaflets,

Test conditions: ISO Temperature: 23±1C Humidity: 50±2%RH