


## Snow Eagle Coated Art Paper - Matt

雪鹰亚光铜版纸

SDPM3, SDPM8

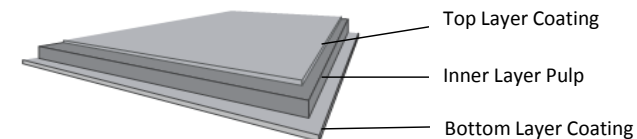

### Technical Specifications

Items	项目	Unit	Standard/ Method	Parameters															
				80	90	95	100	105	115	120	128	140	148	157	170	195	200	250	
Basis Weight	定量	gsm	ISO 536	80	90	95	100	105	115	120	128	140	148	157	170	195	200	250	
Caliper	厚度	μm	ISO 534	72	81	86	91	95	102	106	118	134	145	152	164	196	198	265	
ISO Brightness	亮度	%	ISO 2470	92±1	92±1	92±1	92±1	92±1	92±1	92±1	92±1	92±1	92±1	92±1	92±1	92±1	92±1	92±1	
Bulk	松厚度	cm <sup>3</sup> /g	ISO 534	0.9	0.9	0.905	0.91	0.905	0.887	0.883	0.922	0.96	0.98	0.97	0.965	1.01	0.99	1.06	
Gloss 75°	光泽度	%	ISO 8254/1	25±3	25±3	25±3	25±3	25±3	25±3	25±3	25±3	25±3	25±3	25±3	25±3	25±3	25±3	25±3	
Ink absorption	油墨吸收率	%	K&N	23±3	23±3	23±3	23±3	23±3	23±3	23±3	23±3	23±3	23±3	23±3	23±3	23±3	23±3	23±3	
Surface Printing Intensity	表面印刷强度	m/s	ISO 3783	≥1.5	≥1.5	≥1.5	≥1.5	≥1.5	≥1.5	≥1.5	≥1.5	≥1.5	≥1.5	≥1.5	≥1.5	≥1.5	≥1.5	≥1.5	
Roughness	粗糙度	μm	ISO 8791/4	≤ 2.50	≤ 2.50	≤ 2.50	≤ 2.50	≤ 2.50	≤ 2.50	≤ 2.50	≤ 2.50	≤ 2.50	≤ 2.50	≤ 2.50	≤ 2.50	≤ 2.50	≤ 2.50	≤ 2.50	

\* HSWO grade is available on demand

\* FSC grade is available

\* End uses: High quality magazines, Catalogues, Brochures, Promotional communications, Posters, Leaflets, Flyers

Test conditions: ISO Temperature: 23±1C Humidity: 50±2%RH